




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 3/00, H04M 3/42		A1	(11) International Publication Number: WO 99/35859
			(43) International Publication Date: 15 July 1999 (15.07.99)
(21) International Application Number: PCT/EP99/00152 (22) International Filing Date: 5 January 1999 (05.01.99) (30) Priority Data: 1007969 7 January 1998 (07.01.98) NL (71) Applicant (for all designated States except US): KONINKLIJKE KPN N.V. [NL/NL]; Stationsplein 7, NL-9726 AE Groningen (NL). (72) Inventors; and (75) Inventors/Applicants (for US only): RIETKERK, Paul [NL/NL]; Hoge Morsweg 90, NL-2332 HM Leiden (NL). VAN BARNEVELD, Harry [NL/NL]; Vlamingsstraat 38b, NL-2611 KX Delft (NL). ADRIAANSE, Joost [NL/NL]; Vleerplein 5, NL-2841 XV Moordrecht (NL). VLEER, Laurentius, Josephus, Maria [NL/NL]; Douw van der Kraplaan 17, NL-2252 BT Voorschoten (NL). (74) Agent: KLEIN, Bart; Koninklijke KPN N.V., P.O. Box 95321, NL-2509 CH The Hague (NL).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: INTELLIGENT NETWORK

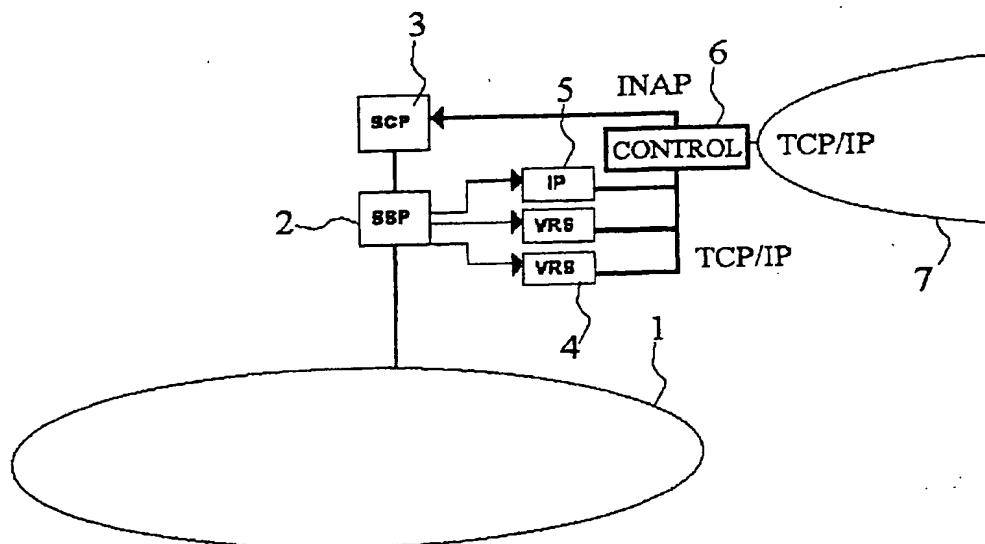

(57) Abstract

Intelligent network (IN), comprising at least one Service Switching Point, SSP (2), at least one Service Control Point, SCP (3), one or more Intelligent Peripherals, IPs (5), and/or one or more Voice Response Systems, VRSs (4), which IN is capable of interacting with a PSTN or ISDN (1). The essence of the concept is an additional interface, in the form of a control member (6), between the IPs and/or VRs on one side and the Service Control Point(s) on the other side. Such makes it possible that the (advanced) IPs and VRSs are capable of exchanging all sorts of information with the SCP, without the IPs or VRSs consequently being occupied for an extended period of time. As a result, the SCP may dispose of (additional) information which in a regular IN cannot be made available to the SCP(s).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Intelligent network.

BACKGROUND OF THE INVENTION

The invention relates to an intelligent network (IN), comprising at least one Service Switching Point, SSP, at least one Service Control Point, SCP, one or more Intelligent Peripherals, IPs, and/or one or more Voice Response Systems, VRSs, which IN is capable of interacting with a PSTN [= Public Switched Telephone Network] or ISDN [- Integrated Services Digital Network].

In the current implementations of IN standards (AIN 0.1, AIN 0.2, CS1 and CS2), there is only provided for playing, through IPs, announcements by VRSs and for receiving DTMF tones [DTMF = dual tone multiple-frequency]. In the current, modern IP and VRS implementations, however, there is offered much more functionality than playing a simple message and receiving DTMF tones. If it is desired to make use of said, more complex functionality, in most cases this will mean that the IP also collects more complex information on a call from the PSTN. For many services, it is of importance to switch through, after receiving said information, to a subsequent destination, the destination being determined on the basis of the information collected. Since the IP cannot return information to the SCP, however, the IP itself will always maintain control over the call and will have to carry out interpretations, if any. The consequence is that any routing-through must always be switched by way of IPs (or VRSs). In doing so, the available lines on the IPs (and VRSs) are occupied for a longer period of time, which is a major impediment for the application of modern IPs and VRSs.

SUMMARY OF THE INVENTION

The object of the present invention is to see to it that, contrary to the aforementioned prior art, the IP or VRS does return the information collected to the SCP; the IP or VRS may then return the call to the Service Switching Point (SSP), so that the line is vacated on the IP or VRS. On the basis of the information received, the SCP may instruct the SSP to switch the call through to another destination. To attain said envisaged object, the network according to the invention provides for a control member which, on one side, is connected to the outputs of the IPs and/or the VRSs, for recording information signals given off by said IPs and VRSs, respectively, which stem from calls from the PSTN, offered to said IPs and/or VRSs

by way of the SSP, which control member buffers the signals recorded from the IPs and VRSSs, while on the other side the control member is connected to the SCP for outputting the information signals to the SCP on behalf of the IPs and VRSSs.

5 Using the control member proposed by the invention, several IP or VRS modules may be simply coupled together within one call, without special IP-IP interfaces or lines being required. In the event of application of the concept according to the invention, the IPs or VRSSs are occupied only for the minimum period of time required. Since in
10 this concept the SSP always activates the IPs or modules, there is no interface required between modules mutually. Combinations of modules within a service may therefore be easily realised. Thus, e.g., a module for the validation of a new credit card may be easily
15 integrated into existing services by including a module call in the service. If modules are already in use, any desired combination with said modules is possible, without the need of adjusting the interface for existing modules.

 Since the SSP continuously sets up new outgoing calls when going through the various modules, it is possible to adopt a different rate for each module. In this case, fixing rates may take place by way of
20 the regular SSP rate-fixing. If no use is made of the concept according to the invention, switching-through will have to be done by the IP and, as to the SSP rate-fixing, only one rate will be permitted for the entire conversation.

25 By placing a central control member on the coupling between an IP or VRS, there is realised a central interface point with which not only may there be driven SCPs but, e.g., also be written or retrieved information from external data bases. Said coupling is of particular importance for services where telephony services are combined with
30 data services (also called Computer Telephony Integration, or CTI). An example thereof is the synchronisation of data screens towards operators having client data and the incoming calls from clients towards said operators.

 Furthermore, the concept is very flexible as various IPs (VRSSs)
35 may be chosen for each module. Combining modules is arranged from the SCP and switched by way of the SSP. As a result, all modules may be combined in random order. If modules (having new possibilities) are later added, they may be combined, in a service, with any existing

modules. Architecture proposed:

EXEMPLARY EMBODIMENTS

FIG. 1 shows the "Super-IP" architecture proposed by the invention. The figure shows a PSTN/ISDN 1 and, as part of an Intelligent-network architecture, an SSP 2, to which a number of VRSS and an IP 5 are connected. The SSP is additionally connected to an SCP. According to the invention, there is mounted a control member 6 which forms a buffer and a coupling between the IPs and VRSSs and the SCP, as a result of which the SCP may be controlled by advanced control signals from modern IPs and VRSSs without, however, using said (expensive) elements any longer than strictly necessary: the output of said elements is included and buffered by the control member 6 until the SCP is capable of using said buffered information. The coupling (designated by bold lines in the figure) may therefore be used for exchanging data collected for the call. There may also be given instructions, possibly by way of the coupling by the IP, VRS or control component, to the SCP for further processing the call. By having the coupling take place by way of a central control member, there originates a central coupling point which may also be used as a bridge to the IT world, such as external IT systems and/or data bases, represented by a network 7, such as the Internet. The protocol used between the IPs and VRSSs and the control member is TCP/IP [TCP = transmission control protocol]; said protocol is also used for communication with the Internet 7. In the connection between the control member 6 and the SCP, the INAP protocol [?] is used.

The central control member 6 may also use the information from the IPs and VRSSs for driving a Computer-Telephony-Integration (CTI) coupling towards desired final destinations (determined in, or by way of, the control member and passed on to the SCP). An example thereof is a transmission pop-up data screen having client information (on the basis of signalling information received, such as the telephone number of the caller) to the final destination (operator) who in synchronisation also receives the call from the client. Within this concept, the central control member operates as a synchronisation point for the telephony and data services. Since, in this concept, the SCP and SSP will take care of the eventual switching-through of a call, there automatically arises the option of network ACD [-

Automatic Call Distributer] and CTI solutions.

The great advantages when applying the concept according to the invention are:

- There is a briefer occupation of IP and VRS line capacity since the IP or VRS need not switch through but may also return the control and the call to the SCP and the SSP. IPs and VRSs are deployed in part of the call as a result of which, within one call, more IPs and/or VRSs may be easily addressed. In addition, IP/VRS applications may be simply and flexibly combined within one service.
- The concept may be simply extended as ever more new IPs and/or VRSs may be used as modules. By applying the concept, the interface problems between IPs and/or VRSs are limited to a minimum.


Since for any module there are set up separate sub-conversations, there may be adopted a different rate for each module.

Synchronisation of telephony and data services is feasible using the central control member.

- Since the SCP continues to control the switching-through of the call (and not the IP, VRS or PABX [= Private Automatic Branch eXchange]), upon application of this concept network ACD and CTI solutions may be realised in a simple manner.

CLAIMS

Intelligent network (IN), comprising at least one Service Switching Point, SSP (2), at least one Service Control Point, SCP (3), one or more Intelligent Peripherals, IPs (5), and/or one or more Voice Response Systems, VRSs (4), which IN is capable of interacting with a PSTN or ISDN (1), characterised by a control member (6) which, on one side, is connected to the outputs of the IPs and VRSs, respectively, for including the information signals given off by said IPs and VRSs, respectively, which stem from calls from the PSTN or ISDN, offered to said IPs and VRSs, respectively, by way of the SSP, which control member buffers the signals included from the IPs and VRSs, respectively, while the control member is connected, on the other side, to the SCP for, on behalf of the IPs and VRSs, respectively, giving off to the SCP, control signals controlled by said information signals.

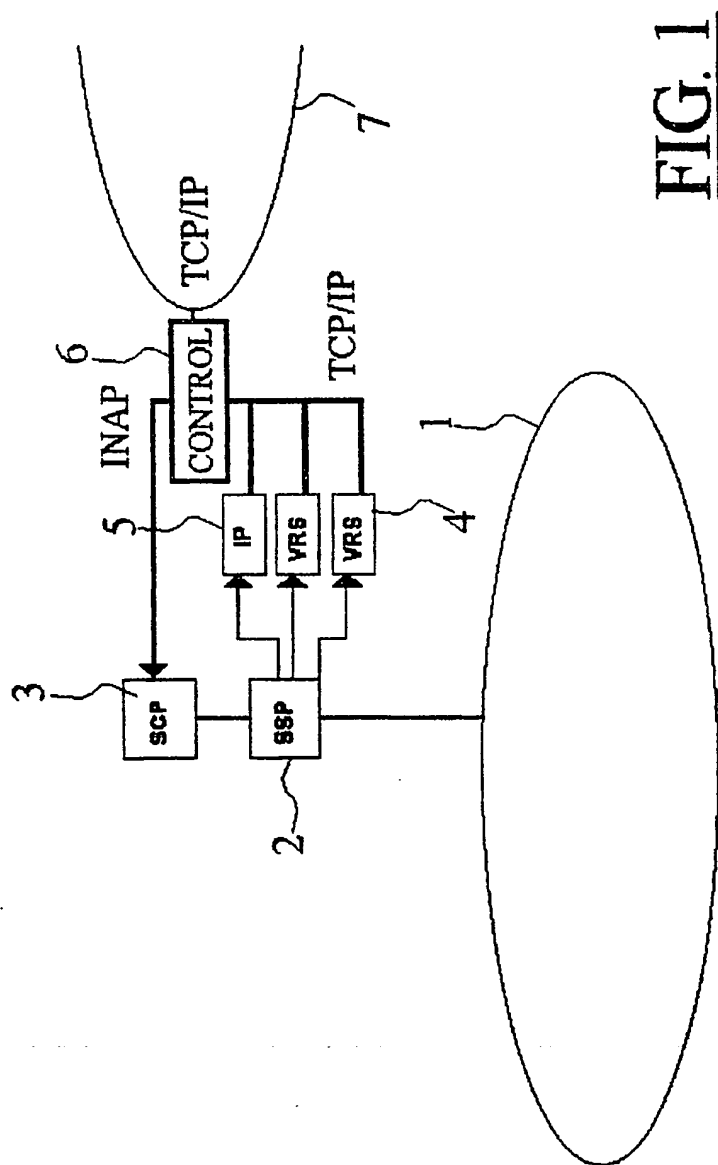**FIG. 1**

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/00152

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q3/00 H04M3/42

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KIHL ET AL.: "On overload control of intelligent peripherals in Intelligent Networks" GLOBAL TELECOMMUNICATIONS CONFERENCE 1996, vol. 3, 18 - 22 November 1996, pages 1539-1543, XP002076720 see page 1539, right-hand column, last paragraph - page 1540, right-hand column, line 47 ---	1
A	CHOPRA: "Exploring intelligent peripheral configurations" INTERNATIONAL CONFERENCE ON UNIVERSAL PERSONAL COMMUNICATIONS, 25 September 1994, pages 635-639, XP000600315 san diego us see page 637, right-hand column, line 9 - page 638, right-hand column, line 49 --- -/--	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone.

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

7 May 1999

Date of mailing of the international search report

17/05/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

De Muyt., H

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/00152

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 572 583 A (WHEELER, JR. ET AL.) 5 November 1996 see abstract; claims 1,2; figure 4B -----	1
A	EP 0 750 432 A (SIEMENS AKTIENGESELLSCHAFT) 27 December 1996 see the whole document -----	1
A	PATENT ABSTRACTS OF JAPAN vol. 17, no. 219 (E-1358), 30 April 1993 & JP 04 354245 A (NEC CORP), 8 December 1992 see abstract -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/00152

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5572583 A	05-11-1996	US 5418844 A	23-05-1995
		US 5583920 A	10-12-1996
		US 5864614 A	26-01-1999
		US 5524146 A	04-06-1996
EP 750432 A	27-12-1996	NONE	

THIS PAGE BLANK (USPTO)